



SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:−40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V−0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30−60 seconds
 (260°C for 10 seconds)

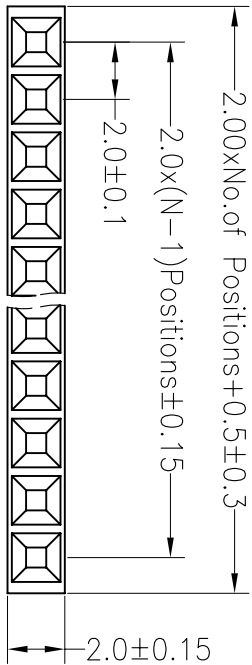


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

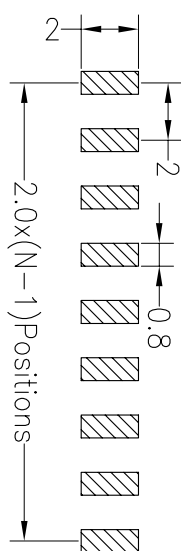

Ordering Information

2363 01 XX X N XX Z Y X01

No. of Pins Per Row 1x2~1*40
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Contact Plating
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
 Packing
 0=Pe Bag
 A=Troy
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar

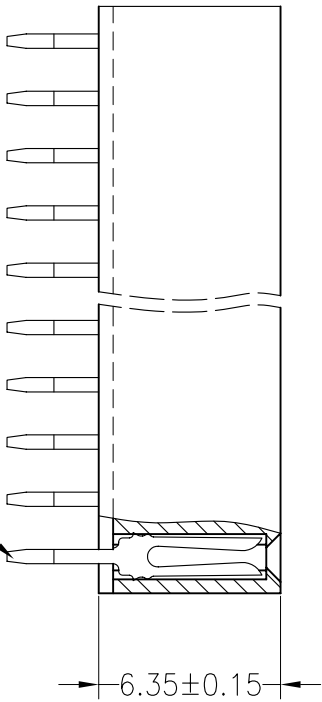

PIN 0.5x0.4

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YTYuSheng	12.04.18	SCALE		FIT	PART NO.	TITLE:
				X.X	±0.30				UNIT	mm			
A0	2012.04.18	NEW DRAWING		X.XX	±0.20	CHECK			A4	mm	A4	236301XXXXXXZYX01	2.00PF H6.35mm 1xNpin 90° SMT
1				X.XXX	±0.10	APPROVE			1/1	1/1			

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992