
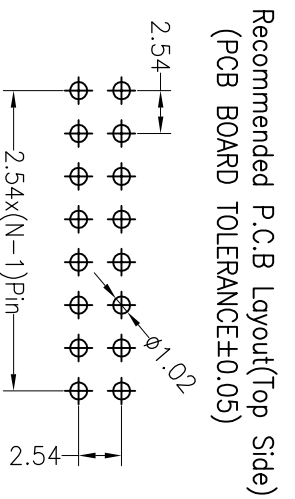


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

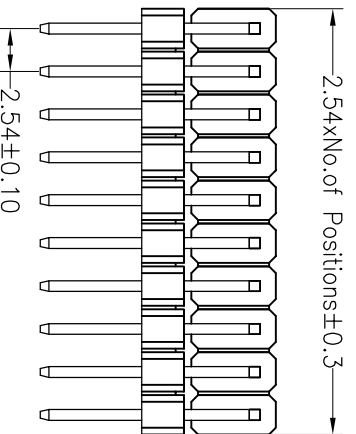

Ordering Information

12252 2 XX X N XX R XXX X03

No. of Pins Per Row	Insulator Material Option	Contact Plating	Pin Length	Packing
1x40	A=BK-PBT	60:Gold Flash	G1:3U" Gold	O=PE Bag
2x40	B=BK-PA66	G1:3U" Gold	G2:5U" Gold	A=Tray
3x40	C=BK-PA6T	G3:10U" Gold	G3:10U" Gold	T=Tube
1--40	D=BK-PA46	G4:15U" Gold	G4:15U" Gold	P=Tube+Cap
2--80	E=BK-PA9T	G5:30U" Gold	G5:30U" Gold	R=Reel+Cap
3--120	F=BK-LCP	S0:Gold Flash/Tin	SN:Tin	M=Reel+Mylar

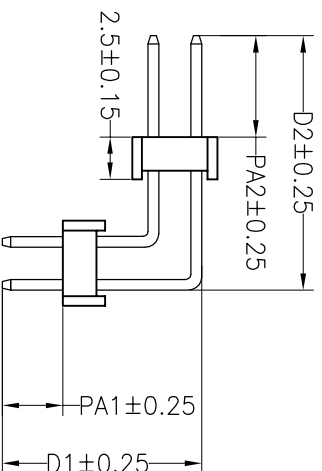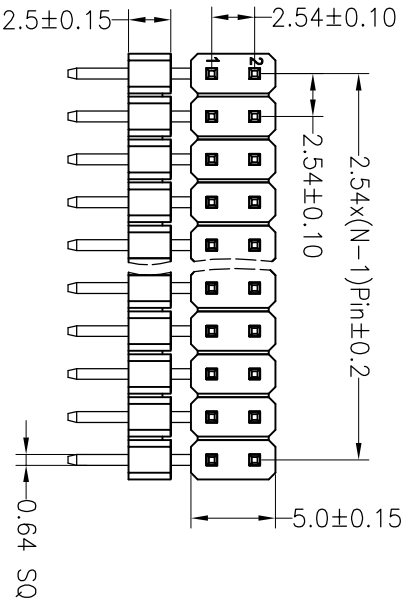

ITEM	PA1	PA2	D1	D2	L
Standard					
Alternate	5.00	5.00	12.58	17.47	24.00/29.00

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

OPERATION	SCALE	FIT	PART NO.
±0.30	UNIT	mm	122522XXXXXXRXXX03
±0.20	SIZE	A4	
±0.10	SHEET	1/1	
±3°	PROJ.		
ANGLE			
DIM			
TOL			
APPROVE			
CHANG			
DATE			
MODIFICATION DESCRIPTION			
NEW DRAWING			
DATE			
2019.10.28			
REV			
A0			

OPERATION	SCALE	FIT	TITLE:
±0.30	UNIT	mm	2.54PH H2.5 Duid Row 90°
±0.20	SIZE	A4	
±0.10	SHEET	1/1	
±3°	PROJ.		
ANGLE			
DIM			
TOL			
APPROVE			
CHANG			
DATE			
2019.10.28			
REV			
A0			