



SPECIFICATIONS





Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



Ordering Information

2285 01 XX X N XX W U X 01

- No. of Pins Per Row 2*40
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:tin
- Packing: 0=PE Bog, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

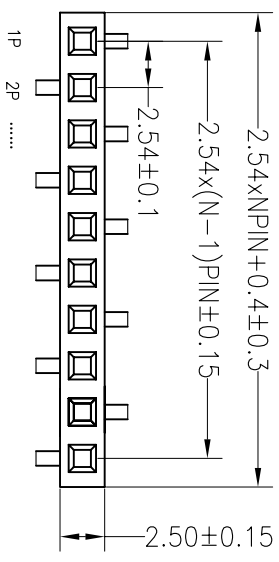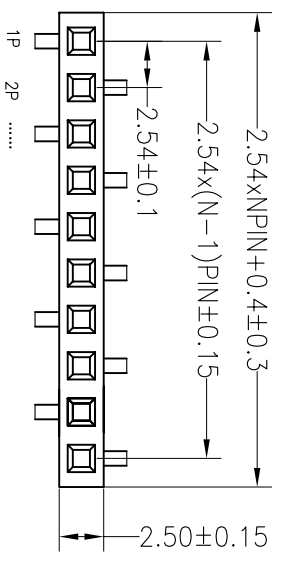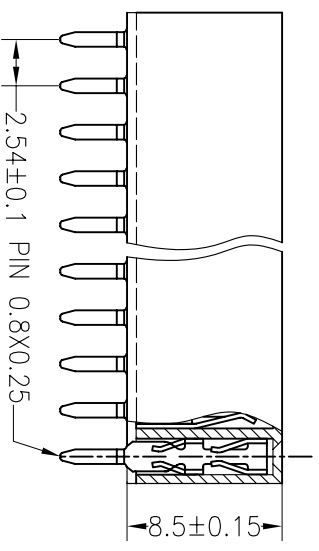

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

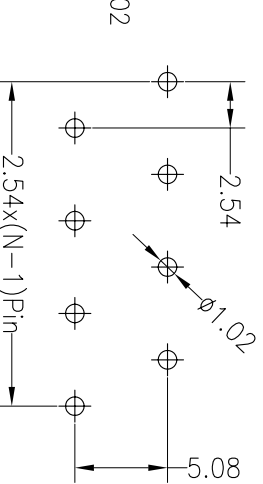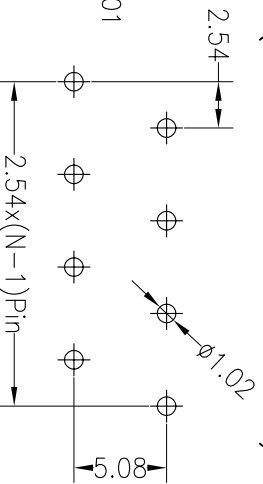

OPERATION		DRAW		SCALE		FIT	
OPERATION	±	DRAW	WZG	UNIT	mm	SHEET	PROJ.
X.X	±0.30	CHECK	15.05.18	A4	1/1		
X.XX	±0.20						
X.XXX	±0.10						
Angle	±3°	APPROVE					
DIM	TOL						

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 2285-01XXXXXWU01
 TITLE: 2.54PF H8.5mm 1xNpin DIP 5.08mm

1 2 3 4 5 6 7 8 9