HSF RoHS

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 10 seconds)

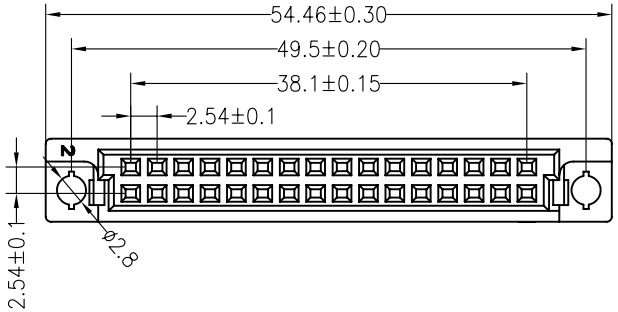



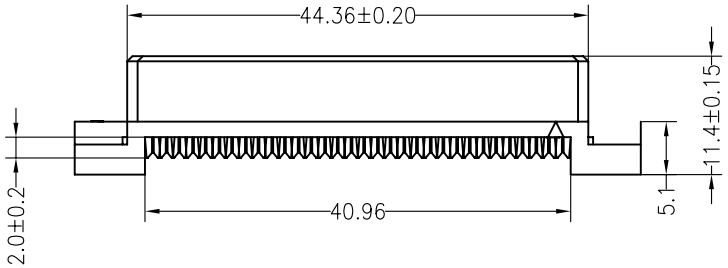







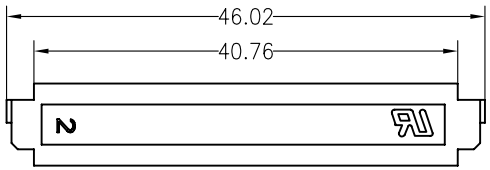

Ordering Information

3512-2 32 B F I XX P N A1

- No.of Pins: 32=32Pin
- Contact Type: A=a+b+c, B=a+b, C=a+c
- Contact Plating: NI:NI, SO:Gold Flash/Ni

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2015.08.10	NEW DRAWING	

OPERATION				
DRAW	YiYuSheng	15.08.10	X.X	±0.30
CHECK			X.XX	±0.20
			X.XXX	±0.10
APPROVE			Angle	±3°
			DIM	TOL

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JiLN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel：86-755-2997-5806/5802 Fax：86-755-2997-5992

PART NO.	3512−232BFIXXPNA1
TITLE:	Din41612 232 Female IDC−Type