

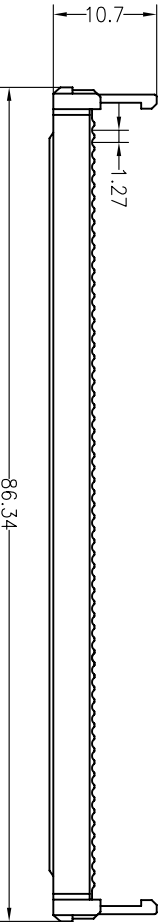
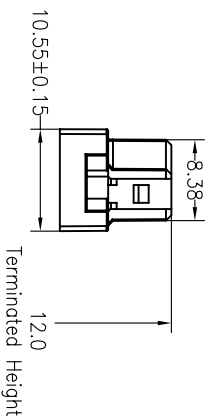
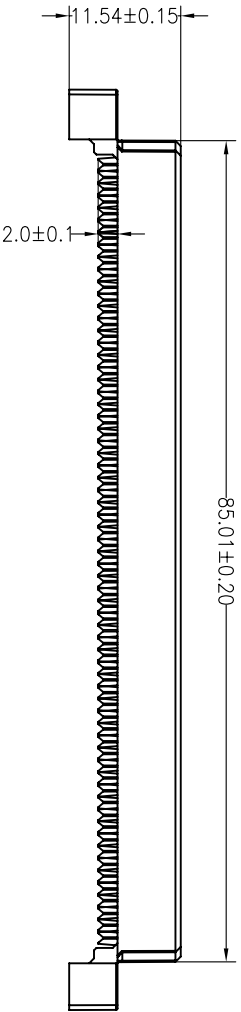



**HSE** ROHS

**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT  
 Max. Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

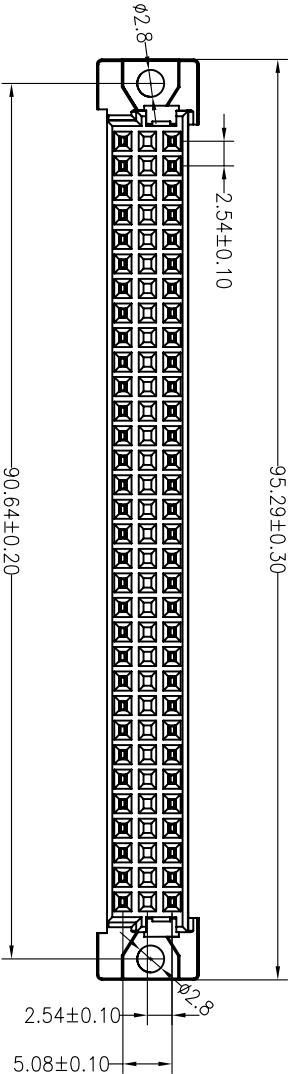

**Ordering Information**

3512 3 64 C F I XX PNA1

No. of Pins: 64=64Pin  
 Contact Type: A=a+b+c, B=a+b, C=a+c  
 Contact Plating: Ni/NI, SO:Gold Flash/Ni

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YYS/SHENG	12.04.10	SCALE		FIT	PART NO.	TITLE:
				XX	±0.30				UNIT	mm			
A0	2012.04.10	NEW DRAWING		X.XX	±0.20	CHECK						3512364CFIXPNA1	Din41612 364 Female IDC-Type
1				Angle	±3°	APPROVE							

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992